



Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

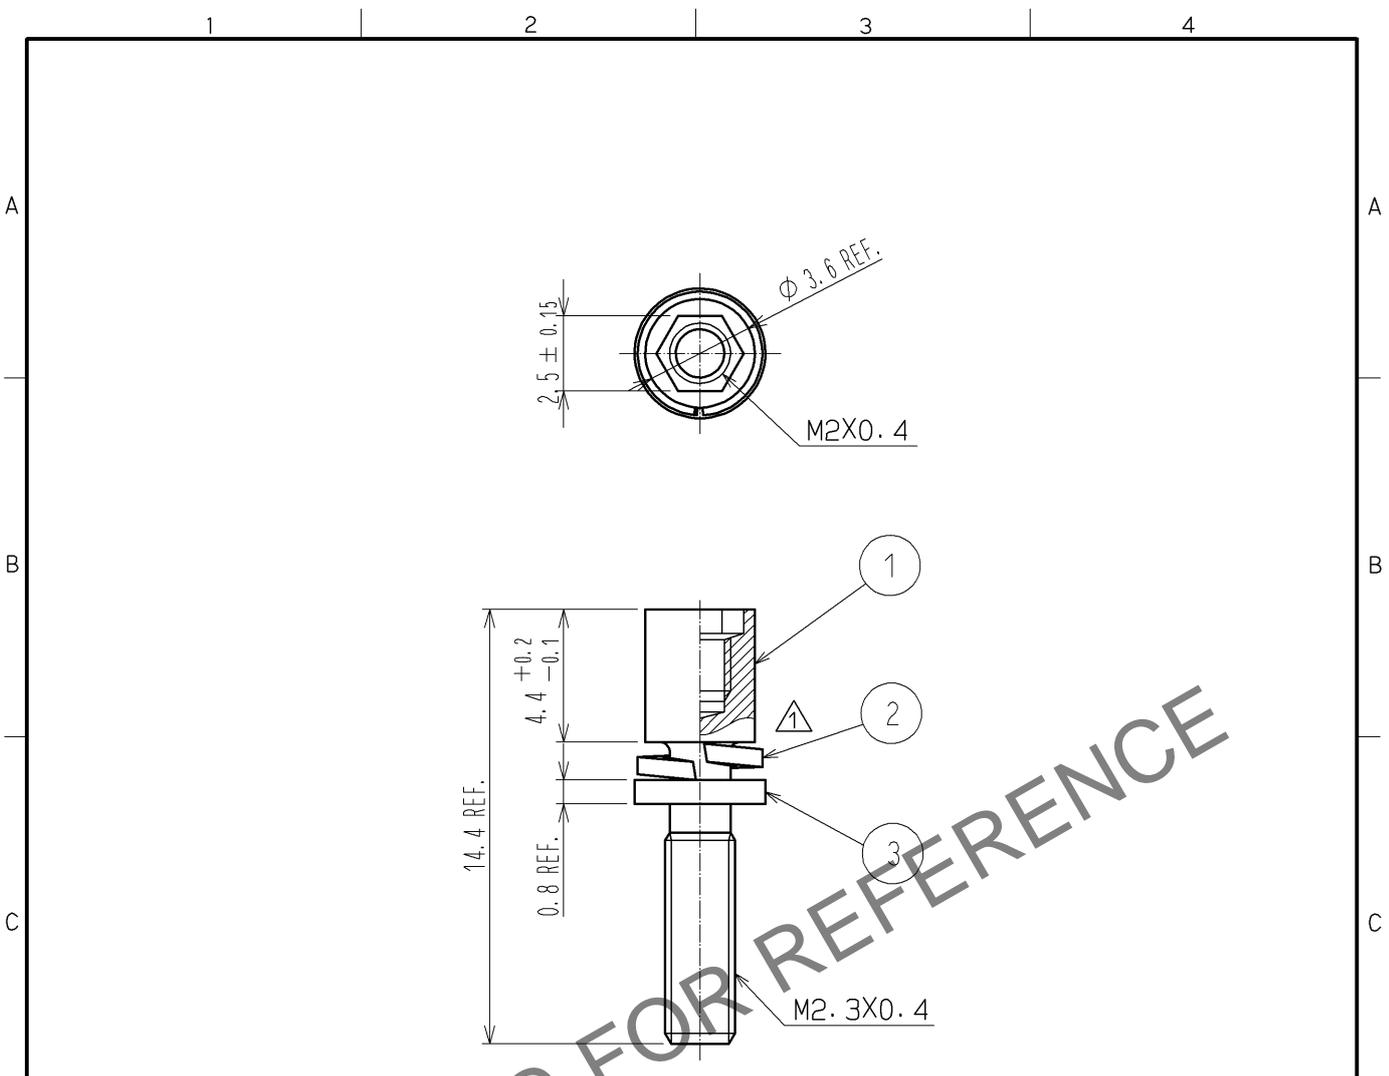

HRS DRAWING FOR REFERENCE

- NOTE ① THIS PRODUCT IS ASSEMBLED TO A "DH60-**P".
 THE APPLICABLE PANEL THICKNESS IS FROM 0.5 TO 0.8mm.
- ② THIS PRODUCT IS PACKED IN A BAG. (QUANTITY IN A BAG : 200pcs.)

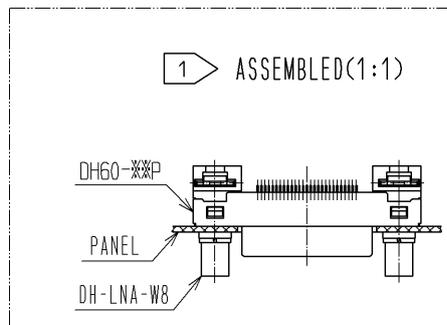

1	STEEL	OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN	3	STEEL	OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 4 : 1	COUNT ② 1	DESCRIPTION OF REVISIONS DIS-E-003059	DESIGNED MO. SHIMOYAMA
HIROSE ELECTRIC CO., LTD.		APPROVED : AO. SUZUKI	09. 04. 27	DRAWING NO. EDC4-126529-00	
		CHECKED : MO. SHIMOYAMA	09. 04. 24	PART NO. DH-LNA-W8	
		DESIGNED : TS. ITO	09. 04. 24	CODE NO. CL244-0004-2-00	
		DRAWN : TS. ITO	09. 04. 24	② 1/1	
DATE 09. 12. 07		CHECKED KN. ICHIKAWA		DATE	