


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

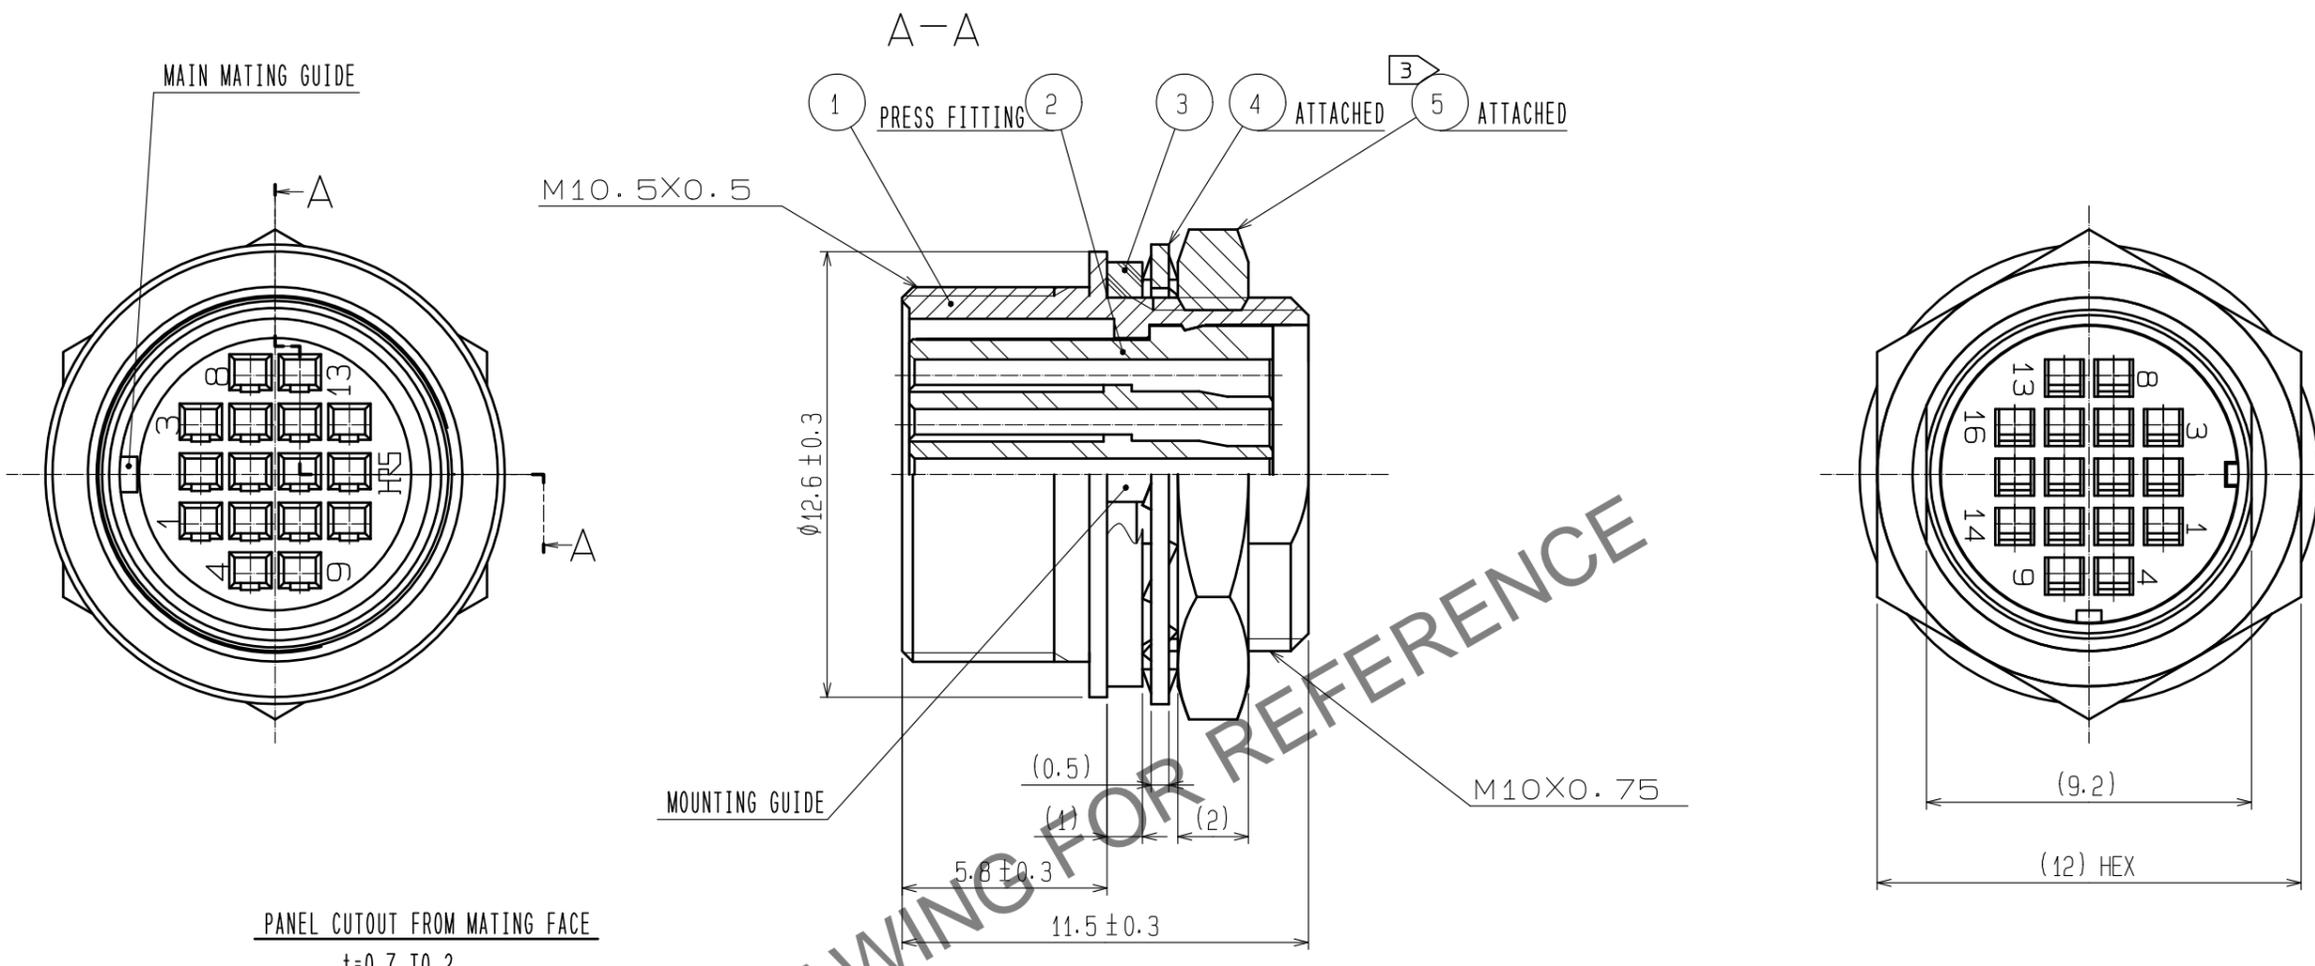

HRS DRAWING FOR REFERENCE

- NOTES 1 APPLICABLE CRIMP CONTACT :HR25-SC-211(CCL125-0422-6)
 (APPLICABLE WIRE:AWG#30,WIRE JACKET DIAMETER:φ0.71 MAX.)
 2 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL:HR25-TPCCL150-0091-0)
 3 THE RECOMMENDED TIGHTENING TORQUE OF REF.No. ⑤ TO BE 1.5N·m.
 COATING WITH LOCTITE 243 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.

3	ETHYLENE PROPYLENE RUBBER	(BLACK)						
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	BRASS	NICKEL PLATING			
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	NICKEL PLATING			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS	mm	SCALE	5 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED	:EJ. KUNII	15.10.14	DRAWING NO.	EDC-110005-71-00		
		CHECKED	:EJ. KUNII	15.10.14	PART NO.	HR25-9TR-16SC(71)		
		DESIGNED	:MM. ISHII	15.10.14	CODE NO.	CL125-0409-8-71		
		DRAWN	:MM. ISHII	15.10.14		①/1		